


GMS 10.5 Tutorial

MODFLOW 6 – Grid Approach

Build a MODFLOW 6 model using a 3D UGrid

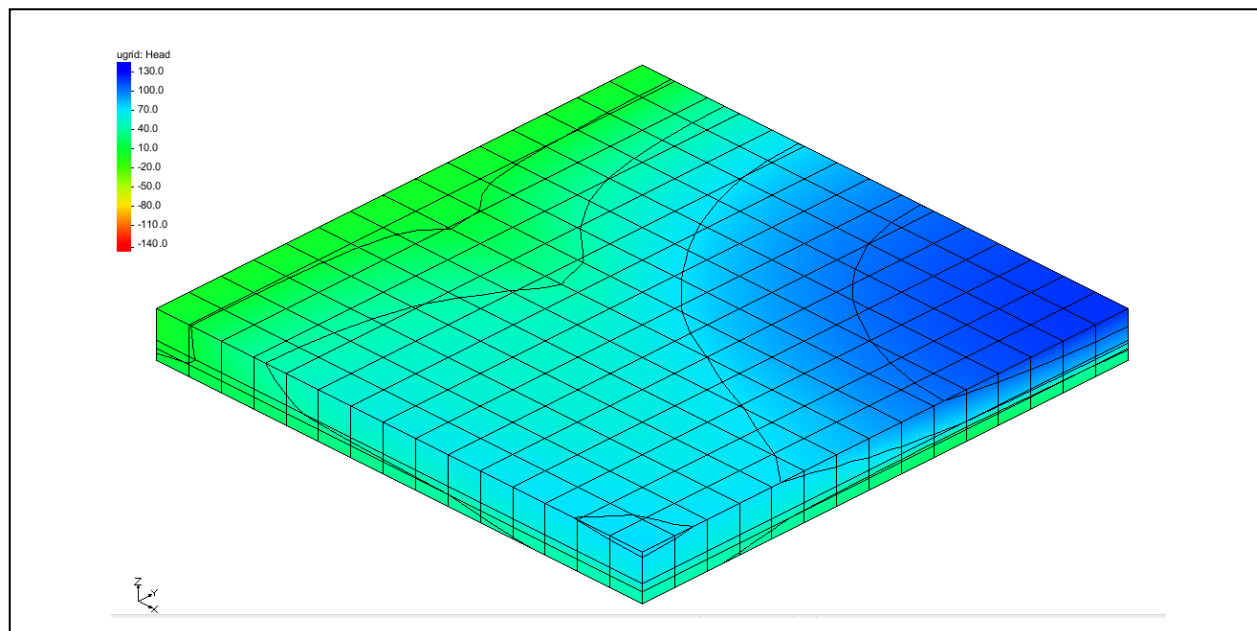

Objectives

The grid approach to MODFLOW 6 pre-processing is described in this tutorial.

Prerequisite Tutorials

- Getting Started

Required Components

- Grid Module
- MODFLOW 6

Time

- 25–45 minutes



1	Introduction	2
2	Getting Started	3
2.1	Opening the Existing Model	3
3	Creating the MODFLOW 6 Simulation.....	4
4	Temporal Discretization.....	5
5	Constant Head Package.....	5
6	The NPF Package	7
6.1	ICELLTYPE.....	7
6.2	Hydraulic Conductivity	8
6.3	Vertical Hydraulic Conductivity.....	8
7	The Recharge Package	8
8	The Drain Package	9
9	The Well Package.....	10
10	Discretization.....	12
11	Initial Conditions	12
12	Output Control	13
13	Saving the Simulation	13
14	Running MODFLOW.....	13
15	Viewing the Solution.....	14
15.1	Changing Layers.....	15
15.2	Color Fill Contours and Color Legend	15
16	Conclusion.....	16

1 Introduction

A simple MODFLOW 6 simulation can be built in GMS using the grid approach. The grid approach involves working directly with the 3D grid to apply sources/sinks and other model parameters on a cell-by-cell basis. The grid approach is useful for simple problems or academic exercises where cell-by-cell editing is necessary.

In GMS, multiple MODFLOW 6 simulations can be created in a single project. This makes creating and comparing variations of the same model simple.

This tutorial uses the first example model that is distributed with MODFLOW 6 (Figure 1). Three aquifers will be simulated using three layers in the computational grid. The grid covers a square region measuring 75000 feet by 75000 feet.

The grid will consist of 15 rows and 15 columns, each cell measuring 5000 feet by 5000 feet in plan view. For simplicity, the elevation of the top and bottom of each layer will be flat. The hydraulic conductivity values shown are for the horizontal direction. For the vertical direction, the tutorial will use some fraction of the horizontal hydraulic conductivity.

Flow into the system is due to infiltration from precipitation and is defined as recharge in the input. Flow out of the system is due to buried drain tubes, discharging wells (not shown on the diagram), and a lake, which is represented by a constant head boundary on the left. Starting heads will be set equal to zero, and a steady state solution will be computed.

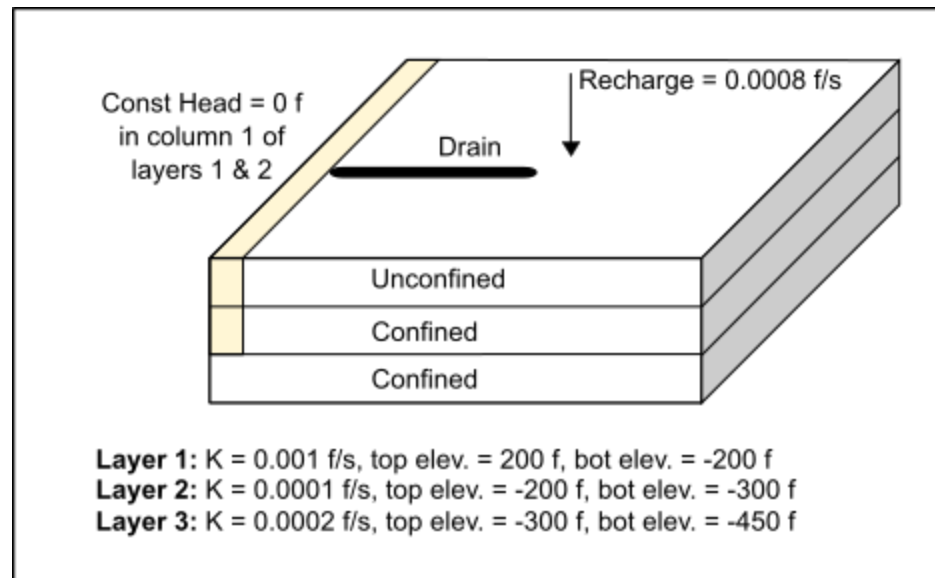


Figure 1 Sample problem to be solved

This tutorial discusses and demonstrates the following:

- Setting up a MODFLOW 6 simulation
- Running MODFLOW 6
- Viewing the solution


2 Getting Started

Do as follows to get started:

1. If necessary, launch GMS.
2. If GMS is already running, select *File / New* command to ensure that the program settings are restored to their default state.

2.1 Opening the Existing Model

Start with a previously-created UGrid.

1. Click **Open**  to bring up the *Open* dialog.
2. Select “Project Files (*.gpr)” from the *Files of type* drop-down.
3. Browse to the *m6grid* folder and select “start.gpr”.
4. Click **Open** to import the project and exit the *Open* dialog.

A UGrid should be visible in the Graphics Window (Figure 2).

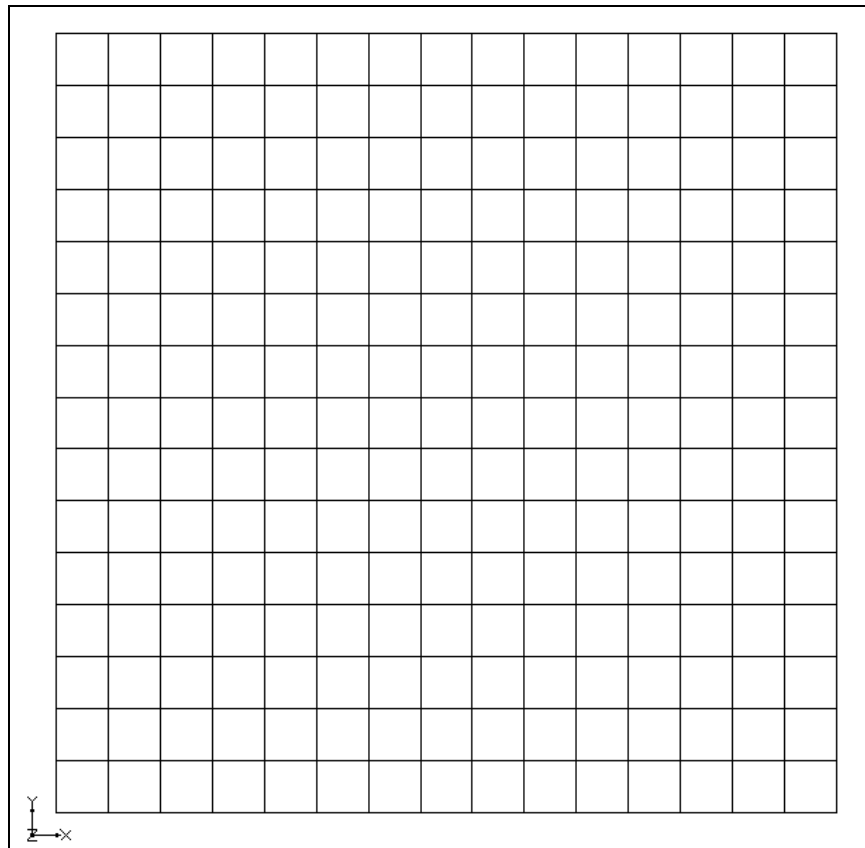



Figure 2 Initial project

3 Creating the MODFLOW 6 Simulation

The next step is to initialize the MODFLOW6 simulation.

1. In the Project Explorer, right-click on “ Project” and select *New Simulation | MODFLOW 6* to bring up the *New MODFLOW 6 Simulation* dialog.

First, select the UGrid. If multiple UGrids were available, the selected UGrid becomes associated with the simulation. Since this project only has one UGrid available, use that UGrid.

2. In the *Select UGrid* section, check the box next to “ ugrid”.


Now select the packages. The input to MODFLOW 6 is subdivided into packages. Optional packages can be selected when setting up the simulation. If needed, optional packages can be added to the simulation later. For now, select the following optional packages:

3. In the *Optional Packages* section, select the following:
 - CHD – Constant Head

- DRN – Drain
- RCH – Recharge
- WEL – Well


Other optional packages should not be selected.

4. Click **OK** to exit the *New MODFLOW 6 Simulation* dialog.

A new simulation (“ model”) will appear in the Project Explorer. Also in the Project Explorer, the different model packages are listed under the model. Along with the optional packages that were selected, the standard TDIS, IMS, DIS, IC, NPF, and OC packages are listed. These are the default names given by GMS. The names of the packages can be changed if desired.

4 Temporal Discretization


Start with reviewing the temporal discretization for the simulation in the TDIS package. This package controls the timing for the simulation.

1. In the Project Explorer, right-click on “ TDIS” and select **Open** to bring up the *Temporal Discretization (TDIS) Package* dialog.
2. Check on *Options* in the *Sections* area.
3. Change the *Time Units* to “Seconds” to match the example.
4. Click **OK** to close the *Temporal Discretization (TDIS) Package* dialog.

5 Constant Head Package

The next step is to define the head boundary along the west sides of the model. In some cases, it is easier to assign values directly to cells. This can be accomplished by editing the properties of the cells. Before using the command, it is necessary to first select the cells in the leftmost column of the top two layers.

Do the following to select the cells:

1. Select the **Select Cells**  tool.
2. In the Mini-Grid Toolbar, make certain *Single Layer* is turned on.
3. Drag a box around all of the cells in the leftmost column of the grid to highlight them (Figure 3).

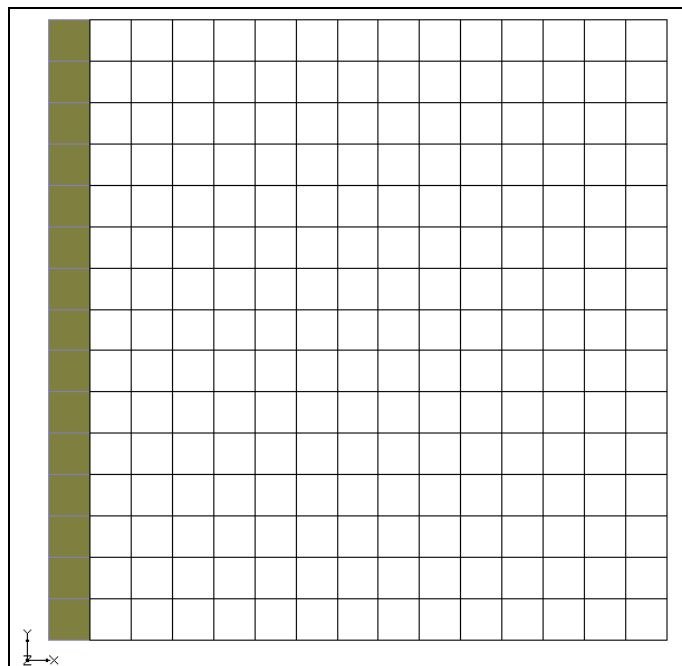



Figure 3 Highlight the leftmost column

To edit the head value:

4. Right-click on one of the selected cells and select **MODFLOW 6 GWF_Model – Cell Properties...** to bring up the *Cell Properties Dialog*.
5. Select “CHD” from the *Packages* list on the left.
6. Click the **Add Rows**  button to open the *Add Stresses* dialog.
7. Enter “0.0” in the *Value* column of the *HEAD* row.
8. Click **OK** to exit the *Add Stresses* dialog.
9. Click **OK** to close the *Cell Properties Dialog*.
10. Repeat steps 2–9 for layer 2 of the UGrid by changing the Mini-Grid Toolbar to *Layer “2”*.

Notice that a diamond symbol is displayed in the cells that were edited, indicating they are constant head cells (Figure 4).

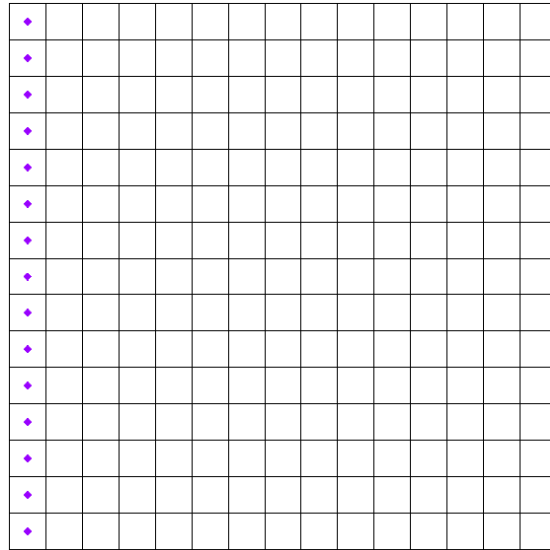



Figure 4 Constant head cells marked on the left

6 The NPF Package

The next step is to enter the data for the Node-Property Flow (NPF) package. The NPF package computes the conductance between each of the grid cells and sets up the finite difference equations for the cell-to-cell flow.

To enter the NPF data:

1. In the Project Explorer, right-click on “ NPF” and select **Open** to bring up the *Node Property Flow (NPF) Package* dialog.

The options in the *Node Property Flow (NPF) Package* are used to define the cell type, hydraulic conductivity, and wetting and drying options for every cell in the model. This problem has three layers. The top layer is convertible, and the bottom two layers are confined.

6.1 ICELLTYPE

First, enter the data for the ICELLTYPE:

1. Select the *ICELLTYPE* tab.
2. Turn on *Layered* and make certain it is set to layer “1”.
3. Enter a value of “1” for the *Constant* value.
4. Change the layer to layer “2”.
5. Enter a value of “0” for the *Constant* value.

6. Change the layer to layer “3”.
7. Enter a value of “0” for the *Constant* value.

6.2 Hydraulic Conductivity

Next, enter the data for the hydraulic conductivity (K):

1. Select the *K* tab.
2. Turn on *Layered* and make certain it is set to layer “1”.
3. Enter a value of “1.e-3” for the *Constant* value.
4. Change the layer to layer “2”.
5. Enter a value of “1.e-4” for the *Constant* value.
6. Change the layer to layer “3”.
7. Enter a value of “2.e-4” for the *Constant* value.

6.3 Vertical Hydraulic Conductivity


Finally, enter the data for vertical hydraulic conductivity (K33):

1. Select the *K33* tab.
2. Turn on the *Define* option.
3. Enter a value of “2.e-8” for the *Constant* value.
4. Click **OK** to close the *Node Property Flow (NPF) Package* dialog.

7 The Recharge Package

Entering data in the recharge package allows simulation of the recharge to an aquifer due to rainfall and infiltration. The Recharge and Evapotranspiration packages can use lists or arrays to define the data, unless the DISU package is used, in which case only lists can be used. The *READASARRAY* option in the *Options* section switches between the two modes.

To enter the recharge data, do the following:

1. In the Project Explorer, right-click on “ RCH” and select **Open** to bring up the *Recharge (RCH) Package* dialog.
2. Select the *RECHARGE* tab.
3. Enter a value of “3.e-8” for the *Constant* value.

- Click **OK** to exit the *Recharge (RCH) Package* dialog.

8 The Drain Package

The next step is to define the row of drains in the top layer of the model. To define the drains, first select the cells where the drains will be located, and then select the **MODFLOW 6 GWF_Model – Cell Properties...** command.

The drains are located in the top layer (layer 1).

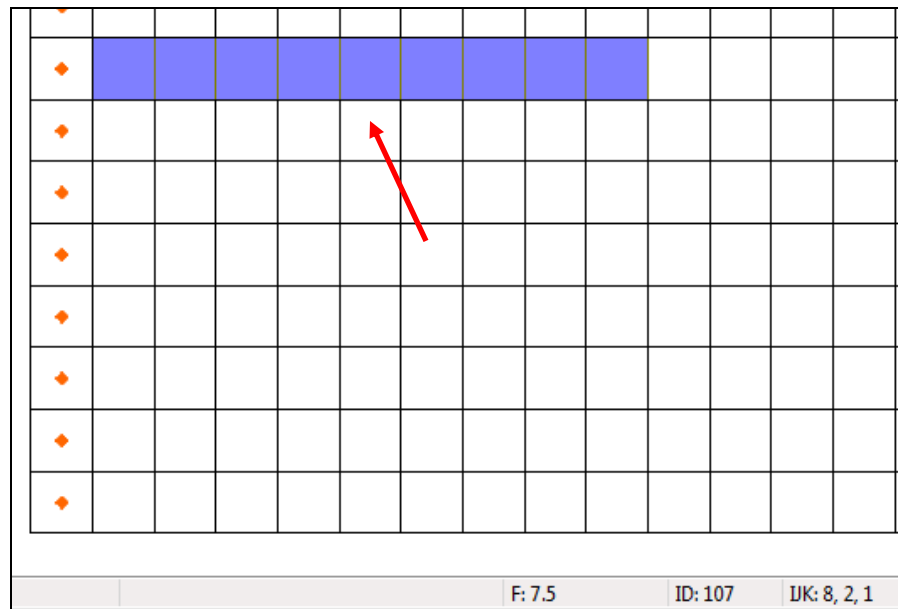





Figure 5 Cells to be selected

To select the cells, do the following:

- In the Mini-Grid Toolbar, enter “1” for the *Layer* then press the *Tab* key.
- Using the **Select Cells**  tool while holding down the *Shift* key, draw a box selecting cells 2–10 on row 8 (Figure 5).

To assign drains to the cells:

- Right-click on one of the selected cells and select **MODFLOW 6 GWF_Model - Cell Properties...** to bring up the *Sources/Sinks Dialog*.
- Select “DRN” from the list on the left.
- Click the **Define Period**  button.
- Click the **Add Rows**  button to open the *Add Stresses* dialog.
- Accept the defaults and click **OK** to exit the *Add Stresses* dialog.

At this point, enter an elevation and a conductance for the selected drains. The drains all have the same conductance but the elevations are not all the same.

8. Enter the following values in the *Elevation (m)* column in the list of drains:

LAY	ROW	COL	ELEV	COND
1	8	2	0.0	1.0
1	8	3	0.0	1.0
1	8	4	10.0	1.0
1	8	5	20.0	1.0
1	8	6	30.0	1.0
1	8	7	50.0	1.0
1	8	8	70.0	1.0
1	8	9	90.0	1.0
1	8	10	100.0	1.0

9. Click **OK** to close the *Sources/Sinks Dialog*.

10. Deselect the cells by clicking anywhere outside the grid.

The drains should now be marked by circles (Figure 6).

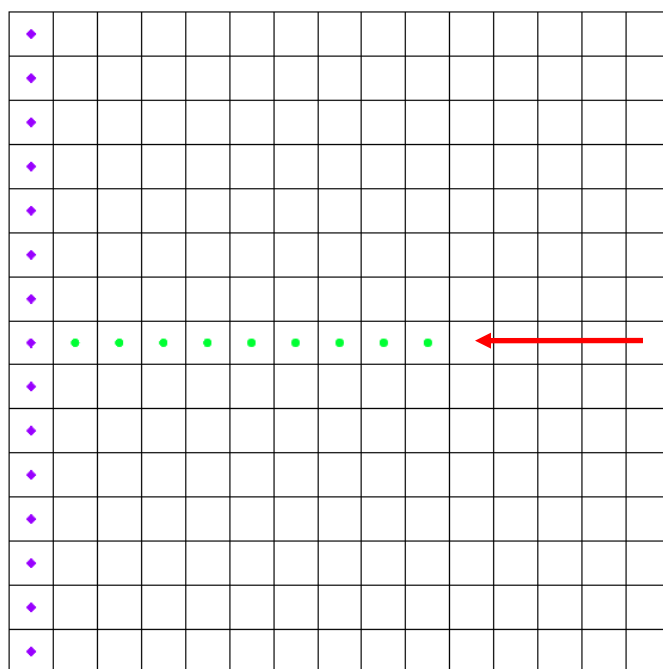





Figure 6 Location of drain cells (green circles)

9 The Well Package

Several wells need to be defined. Most of the wells are in the top layer but some are in the middle and bottom layers. Wells can be defined by selecting cells and entering data as was

done with drain package. However, for this exercise, define all the wells directly using the *Well (WEL) Package* dialog.

1. In the Project Explorer, right-click on “ WEL” and select **Open** to bring up the *Well (WEL) Package* dialog.
2. Click the **Define Period**  button.
3. Click the **Add Rows**  button to open the *Add Stresses* dialog.
4. Change the *Number of rows to add* to be “15”.
5. Click **OK** to close the *Add Stresses* dialog.
6. Define the wells using the values in the following table:

LAY	ROW	COL	Q
3	5	11	-5
2	4	6	-5
2	6	12	-5
1	9	8	-5
1	9	10	-5
1	9	12	-5
1	9	14	-5
1	11	8	-5
1	11	10	-5
1	11	12	-5
1	11	14	-5
1	13	8	-5
1	13	10	-5
1	13	12	-5
1	13	14	-5

A copy of this table can be found as a spreadsheet file, named “wellpackage.xls”, included with the tutorial files. This table can be copied in the dialog using the copy (*Ctrl+C*) and paste (*Ctrl+V*) commands.

7. Click **OK** to close the *Well (WEL) Package* dialog.

Now that all of the wells have been defined, it is possible to see them in the Graphics Window.

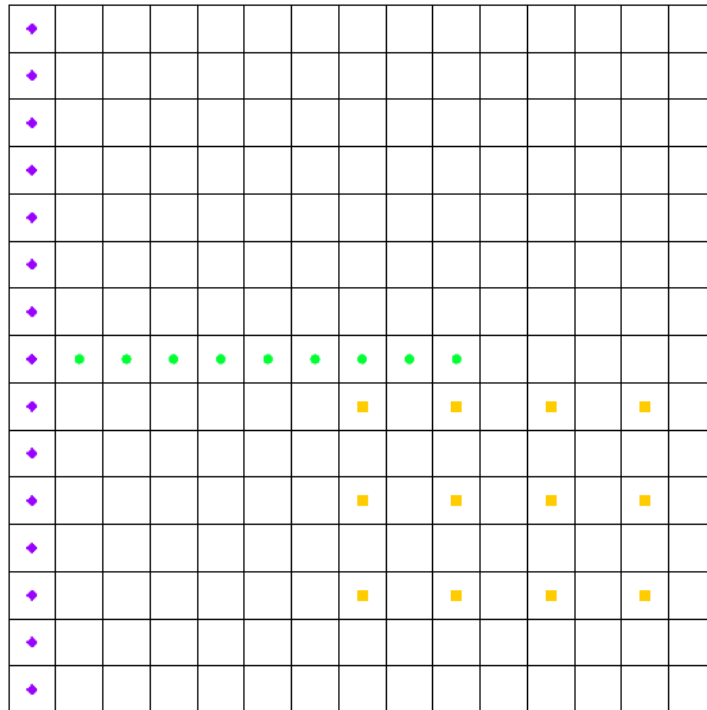



Figure 7 Wells added to the simulation


10 Discretization

Discretization information is set through the DIS package. Review the settings by doing the following:

1. In the Project Explorer, right-click on “ DIS” and select **Open** to bring up the *Structured Discretization (DIS) Package* dialog.
2. Review the values set in the *TOP*, *BOTM*, and *IDOMAIN* tabs.
3. Click **OK** to close the *Structured Discretization (DIS) Package* dialog.


11 Initial Conditions

Review the initial conditions before running the simulation. To do this:

4. In the Project Explorer, right-click on “ IC” and select **Open** to bring up the *Initial Conditions (IC) Package* dialog.
5. Verify that the *Constant* value is set to “1.0”.
6. Click **OK** to close the *Initial Conditions (IC) Package* dialog.

12 Output Control

Before running the simulation, the output needs to be defined. To do this:

7. In the Project Explorer, right-click on “ OC” and select **Open** to bring up the *Output Control (OC) Dialog*.
8. Verify that the *Preset output* is set to “At every time step”.
9. Click **OK** to close the *Output Control (OC) Dialog*.

This dialog also contains an *Options* section. There are two options for the budget file output and the head file output. The *BUDGET_FILEOUT* option specifies a file to which desired flow terms can be written. The *HEAD_FILEOUT* option specifies a file for head information.

13 Saving the Simulation

At this point, the MODFLOW 6 data is completely defined and ready for the simulation run. Before running MODFLOW 6, save the simulation as a new project:

1. Select *File* | **Save As...** to bring up the *Save As* dialog.
2. Browse to the *mf6grid* directory.
3. Select “Project Files (*.gpr)” from the *Save as type* drop-down.
4. Enter “mf6.gpr” as the *File name* and click **Save** to save the project and close the *Save As* dialog.

14 Running MODFLOW



It is now possible to run MODFLOW:

1. In the Project Explorer, right-click on “ model” and select **Save Simulation and Run** to bring up the *Simulation Run Queue* model wrapper dialog.

The **Save Simulation and Run** command exports all of the MODFLOW 6 files necessary for the model run. The *Simulation Run Queue* shows all simulation model runs currently in progress. Since this project only has one simulation, only one is shown.

The MODFLOW 6 solution files are placed in a solution folder generated at the start of the model run. The solution folder contains the native MODFLOW 6 files and input files used in the model run, as well as the outputted solution files. The solution folder also contains component files used by GMS.

2. When MODFLOW 6 finishes, click **Load Solution**.
3. Click **Close** to exit the *Simulation Run Queue* dialog.

4. Make sure the “ Head” dataset is active in the Project Explorer.
5. Click **Display Options**  to bring up the *Display Options* dialog.
6. Select “UGrid: ugrid – [Active]” from the list on the left.
7. Turn on *Face Contours* and click **Options** to open the *Dataset Contour Options dialog – Ugrid* dialog.
8. Change the *Contour Method* to “Block Fill”.
9. Click **OK** to close the *Dataset Contour Options dialog – Ugrid* dialog.
10. Click **OK** to close the *Display Options* dialog.

15 Viewing the Solution

After the solution has been loaded and contours set, the Graphics Window should appear as in Figure 8.

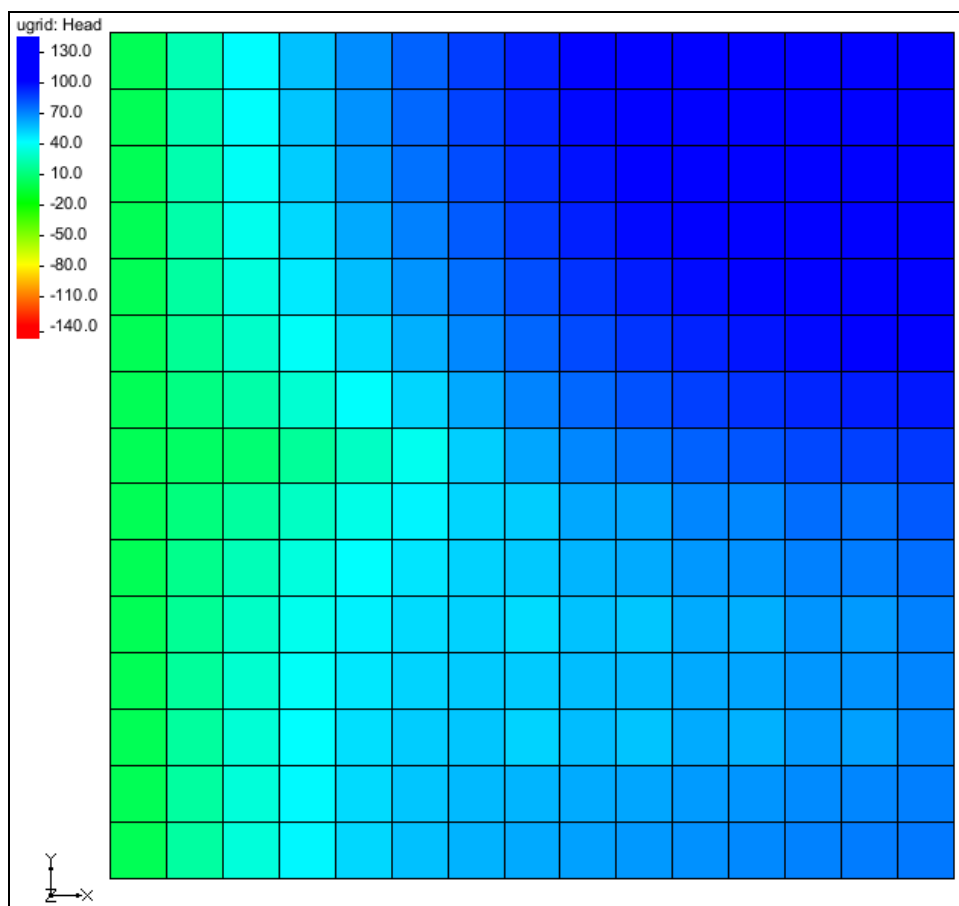


Figure 8 Contours of MODFLOW 6 solution

15.1 Changing Layers

View the solutions on the middle and bottom layers by doing the following:

1. Click the up arrow ▲ in the Mini-Grid Toolbar to go to layer 2 (one click) or layer 3 (two clicks).
2. When finished viewing the middle and bottom layer solutions, use the down arrow ▼ to return to layer 1.

15.2 Color Fill Contours and Color Legend

It is also possible to display the contours using a color fill option.

1. Select *Display* | **Contour Options** to bring up the *Dataset Contour Options – UGrid – Head* dialog.
2. In the *Contour method* section, select “Color Fill” from the top drop-down.
3. At the bottom left, turn on *Legend*
4. Click **OK** to close the *Dataset Contour Options – UGrid – Head* dialog.

The Graphics Window should appear similar to Figure 9.

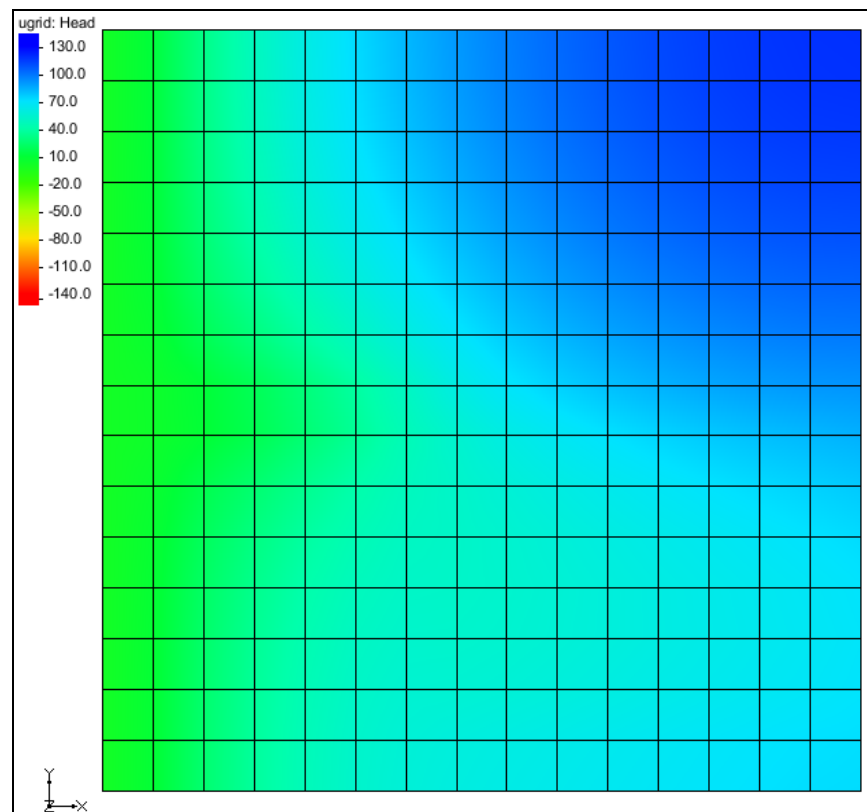


Figure 9 Color fill contours with a legend

16 Conclusion

This concludes the “MODFLOW 6 – Grid Approach” tutorial. The following topics were discussed and demonstrated:

- Creating a MODFLOW 6 simulation.
- Assigning simulation properties to cells in a UGrid.
- Defining package parameters.
- Running the simulation and using the *Simulation Run Queue*.